

Band	1695 - 2180 x2 / 3400 - 3800 x2 / 5150 - 5925
Polarization	XX / XX / X
Half-power Beam Width	360°

Model: DKOBDYKDP-7M45F [Omni-directional Antenna] Rev. 01

Adjustable by Manual Electrical Tilt

Features

- Omni-directional antenna for outdoor DAS and small cells applications
- 4x ports for AWS/PCS band 1695-2180 MHz with MET
- 4x ports for CBRS band 3400-3800 MHz
- 2x ports for U-NII band 5150-5925 MHz*
- Ideal for multi-carrier or 4x4 MIMO deployments
- Two mounting options using pole top and side mount brackets
- Available with 4.3-10(F) connectors

* This antenna meets the FCC testing requirements for UNII-1 band for gain and upper side-lobe performance.
Compliance to 789033 D02 General U-NII Test Procedures New Rules v01404.

Electrical Specifications


Operating Frequency Band ,[MHz]	1695 - 2180 x2 / 3400 - 3800 x2 / 5150 - 5925			
Frequency Range ,[MHz]	1695 - 1880	1880 - 2180	3400 - 3800	5150 - 5925
Polarization , [degrees]	±45° x2	±45° x2	±45° x2	±45°
Gain [dBi]	8	8.5	3	6
Horizontal Beam Width ,[degrees]	360	360	360	360
Vertical Beam Width ,[degrees]	19	18	90	25
Adjustable Electrical Downtilt[degree]	0 - 20	0 - 20	0 (Fixed)	0 (Fixed)
VSWR	≤1.5	≤1.5	≤1.5	≤1.5
Isolation	Cross Polar, [dB]	≥20	≥20	≥20
	Inter Band, [dB]	≥20	≥20	≥20
3rd Order PIM@2x43dBm ,[dBc]	≤ -150	≤ -150	N/A	N/A
Maximum Input Power (per port)	100W	100W	30W	10W
Impedance	50Ω			
Lightning Protection	DC Ground			




Mechanical Specifications

Redome Material	Fiberglass
Connector Type	4.3-10 DIN Female x10
Operating Temperature Range	-40 ~ +65°C (-40 ~ +149°F)
Operating Humidity	0 - 95%RH
Enclosure Protection	IP55
RF Connector Protection	IP67
Wind Load	184N @150 km/h (@93.3 mile/h)
Wind Velocity	241.4 km/h (150 mile/h)
Weight	8.1 kg (17.9 lb)
Dimension (Length x width x depth)	600 x φ240 mm (23.63 x φ9.45 inch)


Port Layout

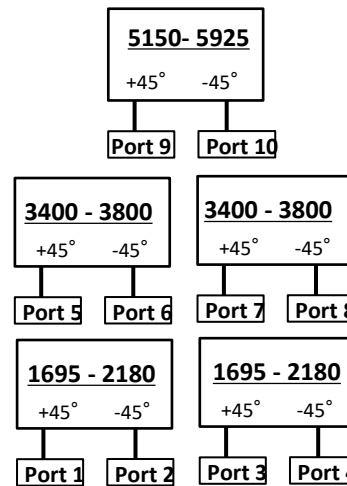


Antenna Array Configurations

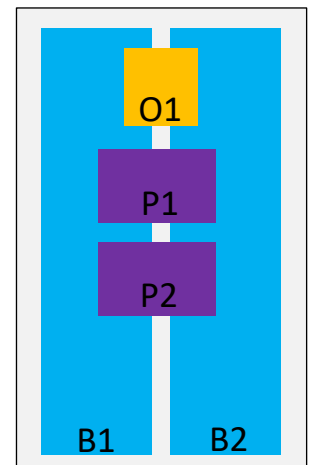


Horizontal Plane

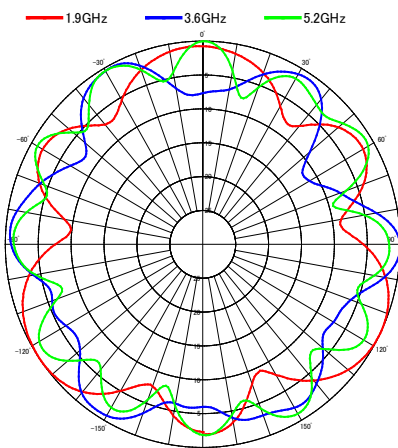



Vertical Plane

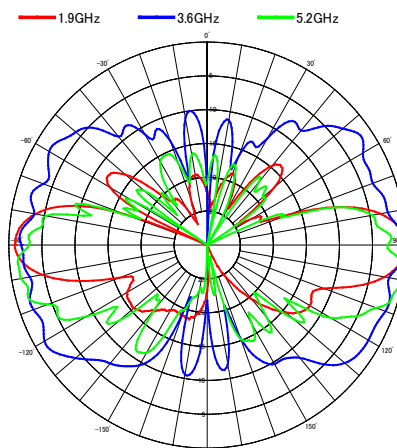

Vertical Pattern (Tilt Angle: 0-10-20[deg.]) 1.9GHz

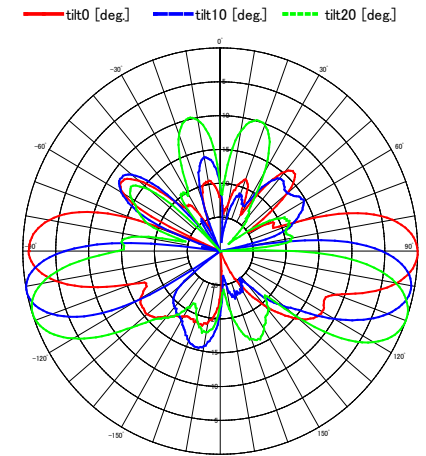

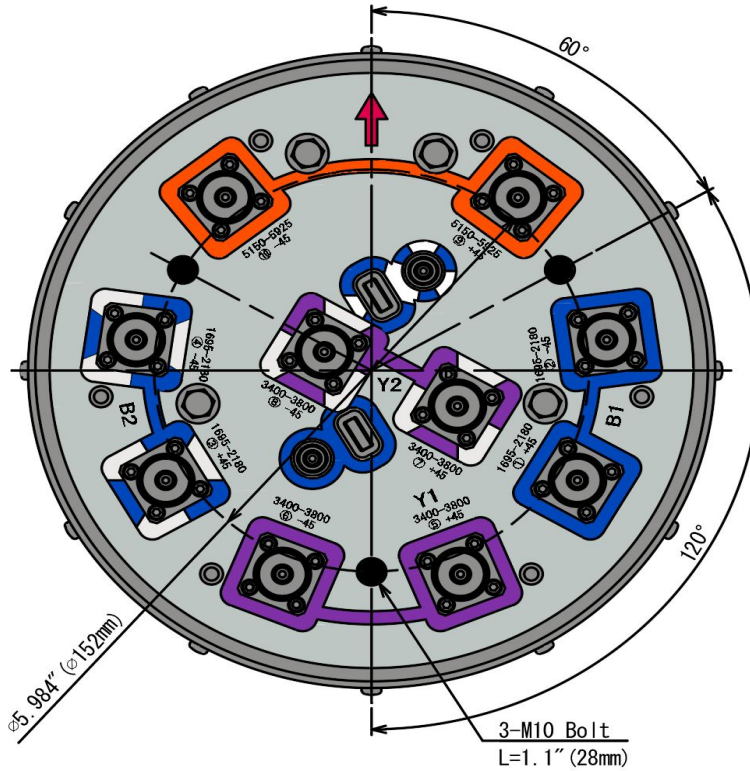Antenna Outline and Bottom View

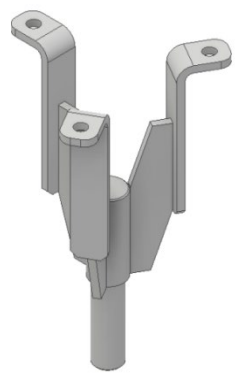Ordering Option and Accessories
Mounting Bracket

Description	Part Number	Desing for reference
Mount Adapter [Wind Velocity : 241.4 km/h (150 mile/h)] [Weight : 2.5 kg (5.5 lb)]	DKAB-A001	
Side Mount Bracket [Wind Velocity : 241.4 km/h (150 mile/h)] [Weight : 2.9 kg (6.4 lb)]	DKAB-A002	