

# Public Safety BDA


Remote Annunciator




### Features

- Support AC Power Normal Alarm
- Support Loss of AC Power Alarm
- Support Battery Capacity Low Alarm
- Support Battery Charger Fail Alarm
- Support RF Emitter Fail Alarm
- Support Donor Antenna Malfunction Alarm
- Support Donor Antenna Disconnection Alarm
- Support System Component Fail Alarm
- Support RS485 Communication

Front view

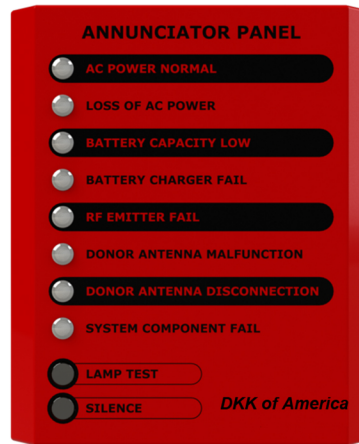

Rear view

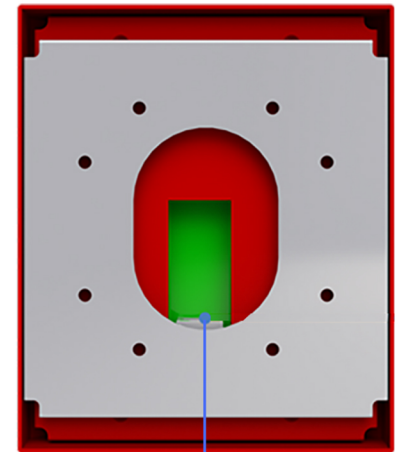

Ethernet port  
(From BDA)

### Product Specification

#### Electrical Specification

Items	Parameters	Remarks
Electrical	Operating Voltage	12 ~ 40V
	Power Consumption	Max. 150[mA] / DC 28V
Interface	Interface Type	RS-485
	Baud Rate	9600bps(Parity:None,Data:8bit,Stop:1bit)

#### Mechanical Specification

W	Size		Weight
	H	D	
5.118in (130mm)	6.10in (155mm)	1.18in (30mm)	0.716lbs (325g)